

Generally, the weight of the non-driving type marking machines is about 100-1000kg, such as truck-mounted road marking machine, small pre-heater and convex road-marking machine. The loading or unloading of these machines is comparatively frequent especially during the changing of the construction field, so it usually needs many workers to do the job. The customers often run into troubles that they can not load or unload the road marking machines successfully because of lacking of workers. At the same time, manual work easily results in equipment damage or personal safety problem. The DAYU brand LU-I and LU-II loading and unloading machines that are scientifically designed completely solve this problem. It only needs one or two workers to finish the loading and unloading work of the equipment when these machines.


The series of loading and unloading machines are fixed on one front side of the vehicle with bolts. The loading and unloading equipment are able to freely turn to proper position after lifting the equipment.

The series of these machines have gained the "CE", "GS", "EMC" certification in Europe, and "UL", "CUL" certification in the United States and Canada. They are easy to be installed and have advantages of perfect performance, safety, stability and little room, etc.

车载式标线机、小型热熔釜、凸起(震荡)标线机等非乘驾类标线机械产品重量一般在100-1000kg左右,该类设备平时尤其是在施工期间转场装卸较为频繁,一般需要数人方能完成装卸工作。用户经常遇到因人员不足而无法将标线机械顺利装卸的现象。同时人工装卸设备很容易造成设备损坏或人身安全问题。精心设计的大予牌LU-1、LU-II系列装卸机彻底解决了标线机械的装卸问题。使用该机只需1-2人操作即可轻松完成设备的装卸工作。

本系列装卸机用螺栓固定在汽车前端一侧,吊起设备后装卸设备能灵活地旋转至合适位置。

本系列机械已取得欧洲 "CE"、"GS"、"EMC"认证及美加地区 "UL"、"CUL"认证,具有安装方便、性能完备、安全可靠及占地极少等特点。

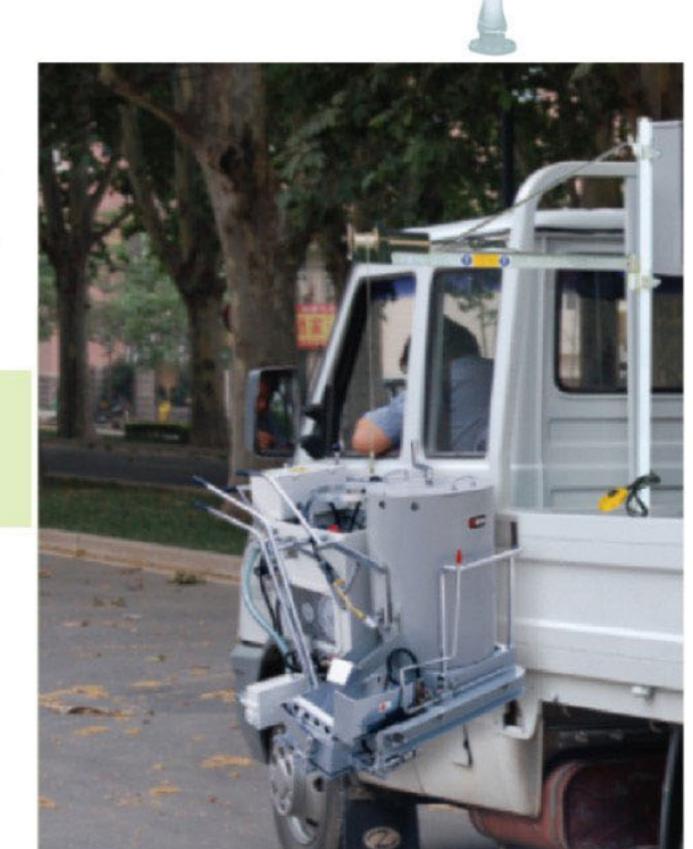

DY-LU-II 装卸器 Loader And Unloader

- ◆1. Rated lifting weight: 650kg.
- ◆2. Rated voltage: 12V (24V).
- ◆3. Cable length: 7.6m.
- ◆4. Installing mode: Fastened on the front side of the truck with bolts.
- ◆5. Operating mode: To turn the beam outward and then operating the controller (up or down).
- ◆6. Net weight: 55kg.

- ◆1.额定吊起重量: 650kg。
- ◆2.额定电压: 12V(24V)。
- ◆3.绳长: 7.6m
- ◆4.安装方式:用螺钉紧固在卡车前端一侧。
- ◆5.操作方式:向外旋转立架横梁后操作控制器(向上或向下)即可。
- ◆6.净重:55kg。

- ◆1. Rated lifting weight: 1100kg
- ◆2. Cable length: 7.6m
- ◆3. Gear: 10:5:1
- ♦4. Installing mode: fastened on the front side of the truck with bolts.
- ◆5. Operating mode: To turn the beam outward and fasten it, then turn the crank manually.
- ♦6. Net weight: 35kg.

- ◆1.额定吊起重量: 1100kg。
- ◆2.绳长: 7.6m
- ◆3.齿轮:10:5:1
- ◆4.安装方式:用螺钉紧固在卡车前端一侧。
- ◆5.操作方式:向外旋转立架横梁紧固后手摇曲柄即可。
- ◆6.净重: 35kg。

DY-LU-I 装卸器 Loader

